


High Current Test

DDL2002R vs DDL2002

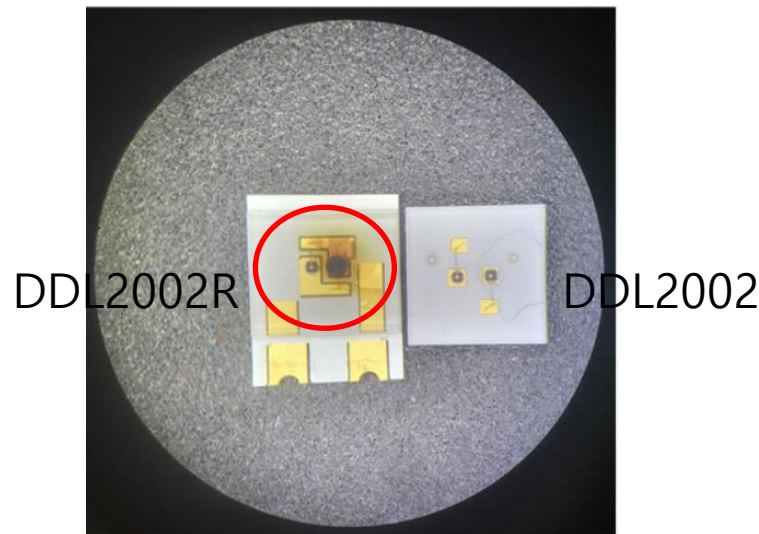

DDL2002R was burnt out @200mA high DC continuous current within 1min, while DDL2002 was still OK over 10min.

DDL2002 is smaller and well designed to release the heat when high current drive. It can allow LEDs the minimized degradation by hot thermal stress.

[DDL2002](#) is recommended for reusable sensor probes at tough condition make sure to survive long time.